

Xelbex[®]

1kW Xenon follow spotlight

SUPERSOL[®] 1004SR/e

for use of small to medium size halls and large ballrooms.

The wide range zoom system installed in SUPERSOL 1004SR/e enables to use for small-medium size halls, and large-size halls for front sides. The high luminance output provides a sharp and powerful light on stage. This is a very well-known model as a medium throw follow spotlight among Japanese market. SUPERSOL 1004SR/e will broaden the opportunities to use at different range of locations.



1 kW Xenon follow spotlight



Powerful & sharp edged beam

Highly efficient optical system & zoom mechanism gives a powerful beam and sharp edged clear light on stage.

Natural Daylight, High CRI

With CRI > 95, it radiates the closest light to natural daylight among all artificial light sources. It vividly and accurately reproduces natural colors on stage, colors of skin tones, costumes, and backdrops as they were meant to be portrayed by the artists and designers.

USHIO short arc Xenon lamp

The followspot comes with an USHIO made Xenon Short Arc Lamp which is exclusively made for follow spotlight use.

Outstanding lighting control with 100 % manually closing iris and douser.

The Iris smoothly closes all the way to 100 % and the douser utilizes a unique blade shape to create smooth dimming.

Compact but sturdy stand

Compact stand makes it ideal to carry and handle, but it's a heavy-duty stand at the same time.

Easy operation & Excellent Balancing

Compact size & light weight

Separate power supply and removable cables

| SUPERSOL® 1004SR/e | |
|--------------------------|--|
| Spot head | XPS-1004SR/e |
| Max. ambient temperature | 40°C |
| Max. surface temperature | 60°C |
| Min. throw distance | 5m |
| Min. offset distance | 0.3m |
| Range of use angle | 10° up / 45° down |
| Cable and connection | DC cable: 8mm ² 2C 5m with connector Control cable: 1.25mm ² 6C 5m with connector |
| Weight | 45.3kg |
| Dimension | W371 x H427 x D1342mm |
| Noise | 48dB or less (Distance 1m) |
| Material | Aluminum casting and sheet iron |
| Xenon short arc lamp | UXL-10PRX |
| Lighting voltage | DC22V (+3V/-1V) |
| Rated power consumption | 990W |
| Rated current | DC45A (Actual current range 32 to 45A) |
| Total luminous flux | 34000 lm |
| Color temperature | Approx. 6000K |
| Cooling method | Forced air cooling 4 to 6m/s |
| Average lifetime | 1000hrs |
| Power Supply | KSX-45MHXP |
| Rated voltage | Single phase 100V to 120V Single phase 173V to 240V |
| Power consumption | At rated input: 2.1kVA |
| Rated frequency | 50/60Hz |
| Input current* | At 100V: 21A At 200V: 11A (60A or less) |
| Input cable | 3.5 mm ² 3C 5m with connector, tip of one side is loose |
| Weight | 13kg |
| Dimension | W180 x H375 x D420mm |
| Noise | Backward of distance 1m 51 dB or less |
| Coating color | Black (ABS resin) |
| Stand | ST-1004/e |
| Materials | Aluminum casting, iron, and stainless pipe |
| Weight | 41.6kg |
| Dimension | W720 x H743 ~ 1203 x D628mm |
| Color changer | XCC-6XB-8" D/e |
| Number of filters | 6 |
| Dimension | W380 x H253x L130mm |
| Weight | Color changer : 2.6kg Balance Weight : 2.1kg |
| Material | Steel |

* figure in parenthesis is inrush current

⚠ Caution and Warning for Safety Use

Please confirm and follow the user manual and safety instructions for your own safety.



USHIO LIGHTING, INC.

Head Office: RBM Higashi Yaesu Bldg., 2-9-1 Hatchobori, Chuo-ku, Tokyo 104-0032


Tel: +81-3-3552-8264

URL : www.ushiolighting.co.jp

email : info@ushiolighting.co.jp


- Please note that the form, specifications, and price of the products in the catalogue are subject to change without notice.
- The color of the actual product and as depicted in the catalogue may slightly differ because of the printing process.
- Xebex is a registered trademark of USHIO LIGHTING, INC.
- All information including technical details mentioned in this brochure is as of June, 2017.

Photometric data

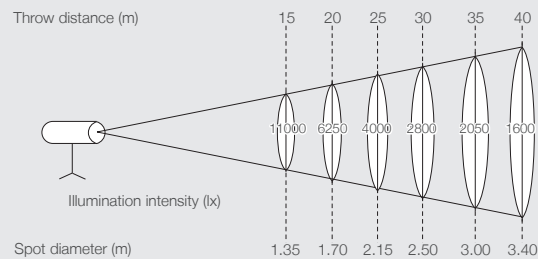

* The above spot diameter is minimum data.
The maximum spot diameter (compared with minimum data) is 2 times zoom ratio.

Dimensions

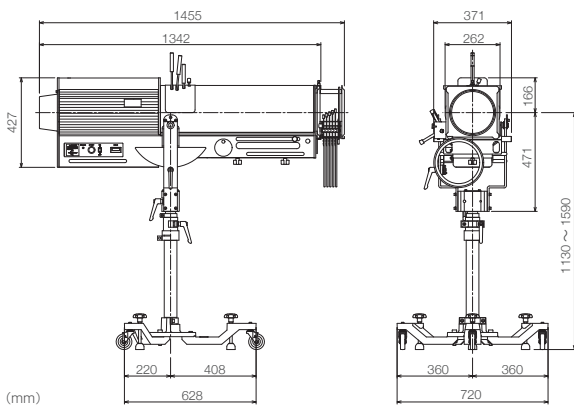

Product Configuration

Spot Head XPS-1004SR/e



Power Supply KSX-45MHXP



Lamp UXL-10PR



Stand ST-1004/e



Color Changer XCC-6XB-8"D/e

